



PRODUCT SPECIFICATIONS



PRODUCT: 24 INCH Touch Screen Monitor

PRODUCT NO.: AL-R2405T

FEATURES

- **10-Point Capacitive Touch – Smooth & Responsive Interaction**


Featuring advanced 10-point multi-touch technology for precise and fluid control, supporting gestures like zoom, swipe, and rotate. Ideal for interactive kiosks, digital signage, and collaborative applications.

- **Sleek & Minimalist Design – Fits Any Modern Space**

A slim, borderless design with a durable metal frame, blending seamlessly into retail stores, offices, or public venues. Easy to mount (VESA compatible) and enhances any professional environment.



- **Versatile Connectivity + Built-in Audio – All-in-One Solution**

Equipped with HDMI, VGA, USB, audio in/out, and integrated speakers for hassle-free connectivity with PCs, media players, and more. No extra sound system needed—saves cost and simplifies setup.

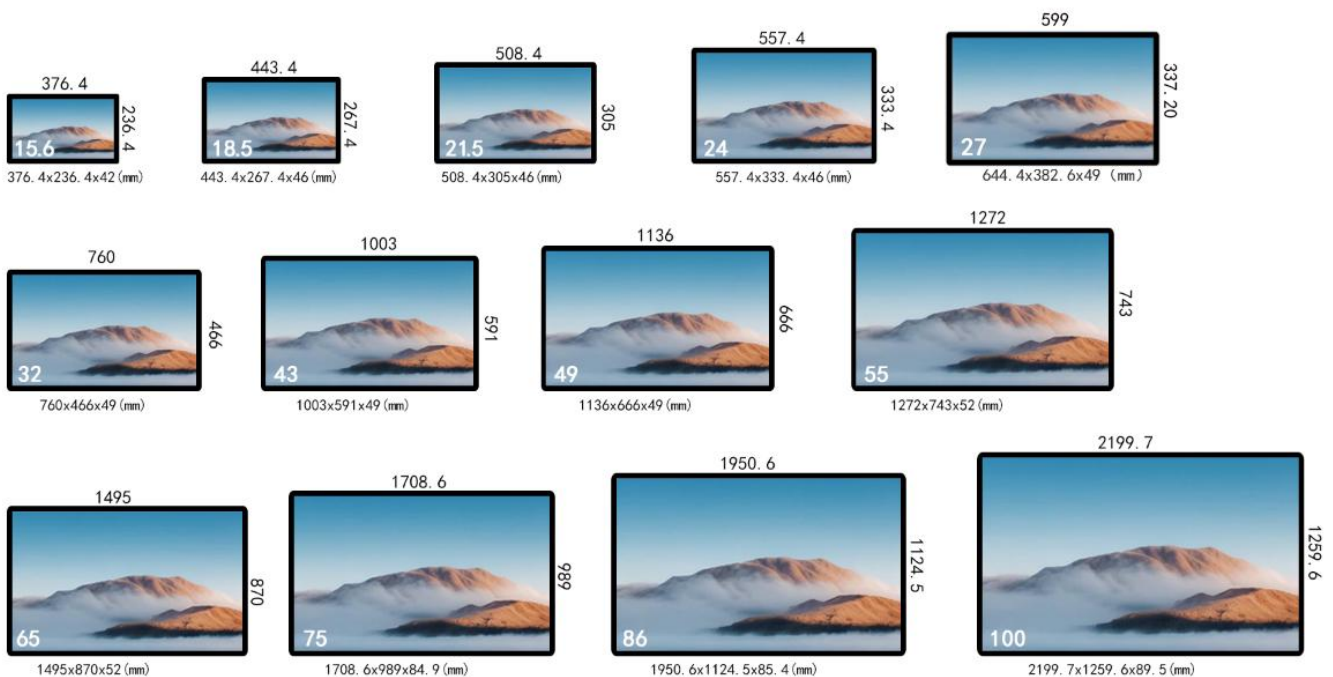


DIMENSION

24 Inch

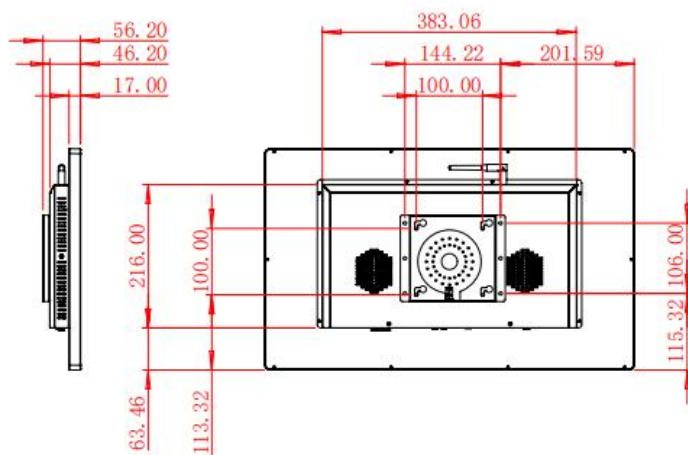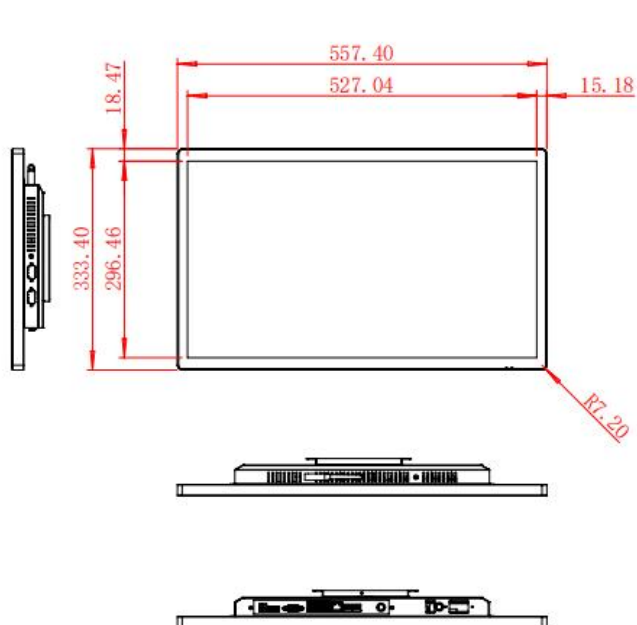

Packing Size: 635*415*110mm

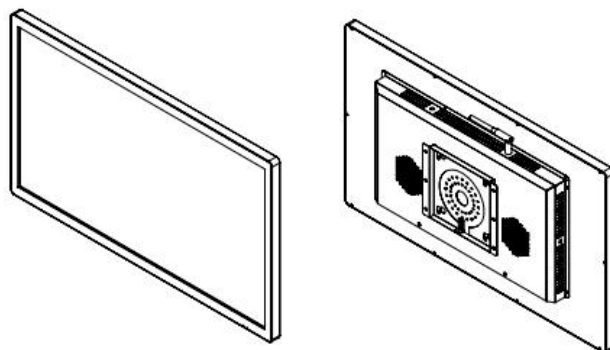

SPECIFICATION

Screen Specification	
Size	24 Inch
Dimension	557.4x333.4x56.2mm
Display Area	527.04x296.46mm
View Angle(H/V)	178°(H), 178°(V)
Resolution	1920x1080 Pixels
Color	16.7M
Brightness	Default 250cd/m2
Contrast Ratio	>1200:1
Response Time	<7ms
Backlight	LED
Screen Type	IPS
Backlight Life	>50000H
Speaker	Up to One 8 Ω 5W Dual Channel Speaker Output
Power	DC 12V-24V, AC 110V-230V
Maximum Power	≤30W
Working Temperature	-10℃ ~ 55℃
Operating Humidity	10% ~ 90%, No condensation
Features	
Chipset	MT9700
OSD Language	English, Multi-Language
Panel Type	TFT LCD With LED Backlight
Interface	Dual/single LVDS Interface
Resolution	1920*1080
VGA Input	Signal: Anglog RGB(0.7Vpp)
	Connector: 15Pin D-Sub
HDMI Input	Signal: T.M.D.S
	Connector: 19Pin HDMI
Horizontal frequency	31.5-80.0KHz
Vertical frequency	55-75Hz
Video Mode	VGA,SVGA,XGA,SXGA,WSXGA+,WXGA, WXGA+,HD+,FHD

Video Output	Signal: R,G,B 8bit LVDS Output
	Connector: 30Pin 2.0mm Pitch
	Color Temp: 9300/6500/7500/Srgb/User-defined
Audio Input	Signal: PC-RGB
	Connector: 5Pin 3.5mm Audio
DC input Requirement	12V(+0.6V)/3.0A
Panel Power Input	+5Vdc
Power OFF Model	<0.5W
Typical Output Current	360mA (Adj Duty=100%,RL=panel)
Max Output Voltage	60V (Adj Duty=100%,RL=panel)
Interface	
USB	1
HDMI	1
VGA	1
Accessory&Package	
Power Supply Cable	1
USB Cable	1
HDMI Cable	1
Warranty Card	1
Instructions	1
Package	Gravity Box Packaging
Available Color	
Colors	Black/ Siver/ White